

2




1

PART NUMBER	DIM. A
PS121A-0131GG-P	.125"
PS121A-0132GG-P	.180"
PS121A-0133GG-P	.215"

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/16/2020

B

B

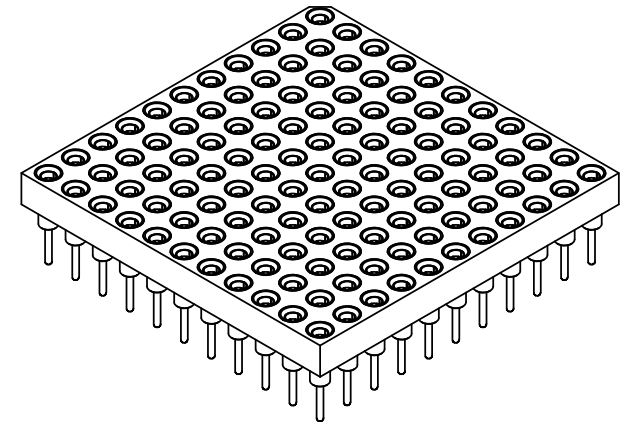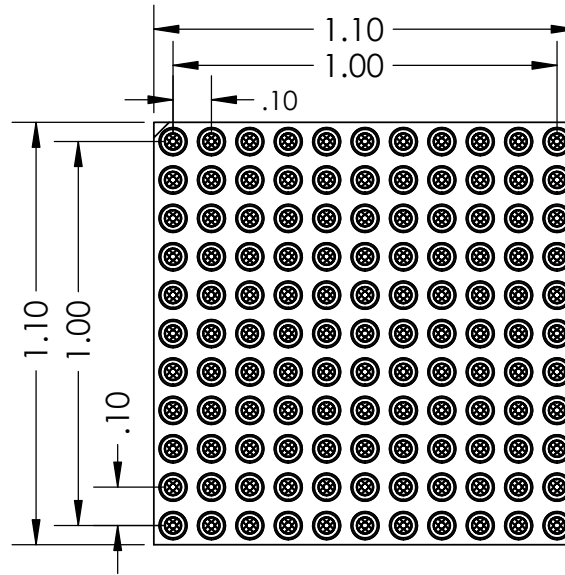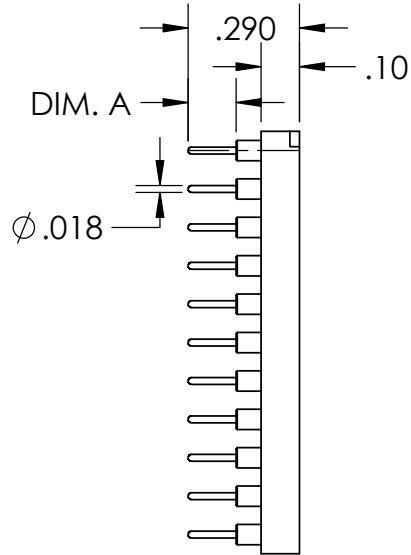

A


A

NOTE:

- INSULATOR MATERIAL: GLASS FILLED POLYESTER
- FLAMABILITY RATING: UL94V-0
- OPERATING TEMP: -55C TO +125C
- ACCEPTS -.015-.021 DIAMETER PIN
- SHELL MATERIAL: BRASS ALLOY C36000, 1/2 HARD
- SHELL PLATING 10µ MIN. OVER NICKEL, 100µ MIN
- CONTACT MATERIAL: BeCu
- CONTACT PLATING: 10µ MIN. OVER NICKEL, 100µ MIN

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAPTERS-PLUS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAPTERS-PLUS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 Adapters-Plus Inc. Ph: 209-839-0200 web: www.adapt-plus.com	
DIMENSIONS ARE IN INCHES		DRAWN	AM		09/16/20
TOLERANCES:		CHECKED	SB		09/16/20
FRACTIONAL ± .1		ENG APPR.			
ANGULAR: MACH ± .1		MFG APPR.			
TWO PLACE DECIMAL ± .01		Q.A.			
THREE PLACE DECIMAL ± .005		COMMENTS:		TITLE:	
INTERPRET GEOMETRIC TOLERANCING PER:				121 PIN PGA SOCKET 11X11 GRID	
MATERIAL				SIZE	
FINISH				DWG. NO.	
DO NOT SCALE DRAWING				PS121A-013XGG-P	
				REV	
				A	
		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1	

2

1