



2

1

PART NUMBER	DIM. A
PS135A-0131GG-P	.125"
PS135A-0132GG-P	.180"
PS135A-0133GG-P	.215"

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	9/18/2020

B

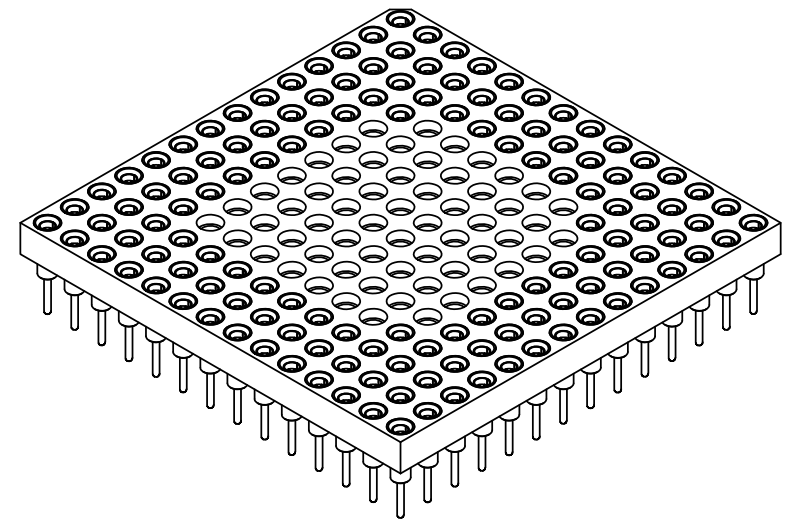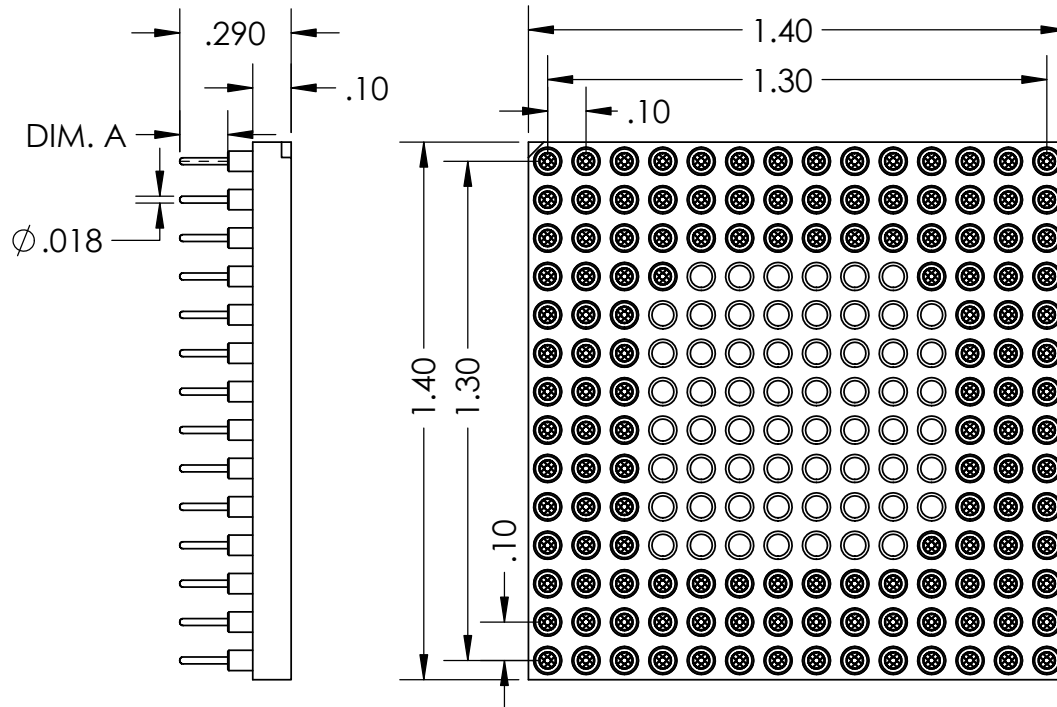


B

A

- NOTE:
- INSULATOR MATERIAL: GLASS FILLED POLYESTER
 - FLAMABILITY RATING: UL94V-0
 - OPERATING TEMP: -55C TO +125C
 - ACCEPTS -.015-.021 DIAMETER PIN
 - SHELL MATERIAL: BRASS ALLOY C36000, 1/2 HARD
 - SHELL PLATING 10μ MIN. OVER NICKEL, 100μ MIN
 - CONTACT MATERIAL: BeCu
 - CONTACT PLATING: 10μ MIN. OVER NICKEL, 100μ MIN

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADAPTERS-PLUS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADAPTERS-PLUS IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 Adapters-Plus Inc. Ph: 209-839-0200 web: www.adapt-plus.com
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± .1 ANGULAR: MACH ± .1 TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		DRAWN	AM	
		CHECKED	SB	09/18/20
		ENG APPR.		
		MFG APPR.		
		Q.A.		
		COMMENTS:		
		SIZE	DWG. NO.	REV
		A	PS135A-013XGG-P	A
		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

A

2

1